


# TECHNICAL DATA

## HEATSCOPE® SmartBox

HEATSCOPE®  
Infrared control

somfy®  
I/O control

<b>Voltage</b>	220-240 V AC ~ - 50/60 Hz	
<b>Amperage</b>	per heating step max. 16 A contact rating ohmic load	
<b>Measurements (WxHxD)</b>	100 x 170 x 35.5 mm	
<b>Weight</b>	0.35 kg excl. mounting panel 0.51 kg incl. mounting panel	
<b>Control steps</b>	ON   OFF 100% + 50%	
<b>Protection class</b>	IP 65	
<b>CE standard</b>	yes	
<b>Included accessories</b>	Mounting panel for wall and ceiling mounting	
<b>Remot control included in scope of delivery</b>	yes HEATSCOPE® IR remote control	no order I/O remot control via somfy® specialized trade
<b>Automatic shut down</b>	yes (deactivatable) after 4, 6 or 8 hours	no

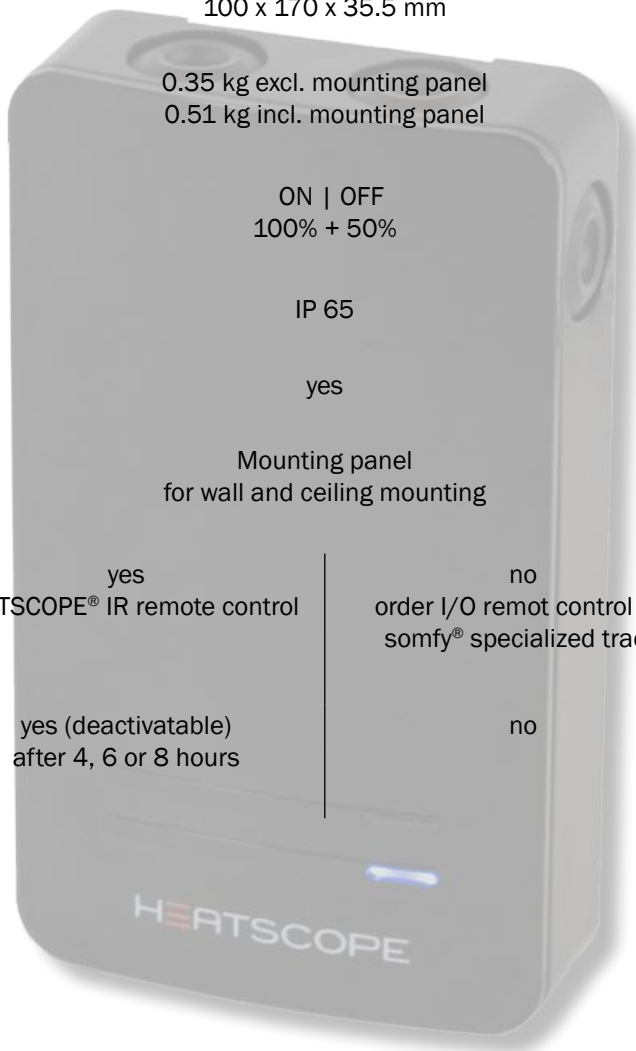

© MHS GmbH 2020ff. Technische und maßvolle Änderungen sowie Satz- und Druckfehler vorbehalten. Subject to technical changes, printing and typesetting errors.